


**SK60****THERMO-STOVES**

mm 680x660xh1080

CE EN -13240 certification

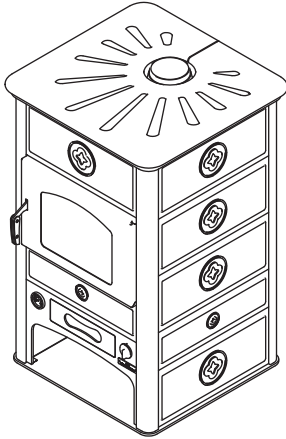


SK60

Ceramic tiles white, bordeaux, ground

**STANDARD EQUIPMENT**

- above flue  $\varnothing$  150 mm
- safety heat exhaust outfitted for connection to a close circuit
- pump thermostat
- primary air thermostatic regulation

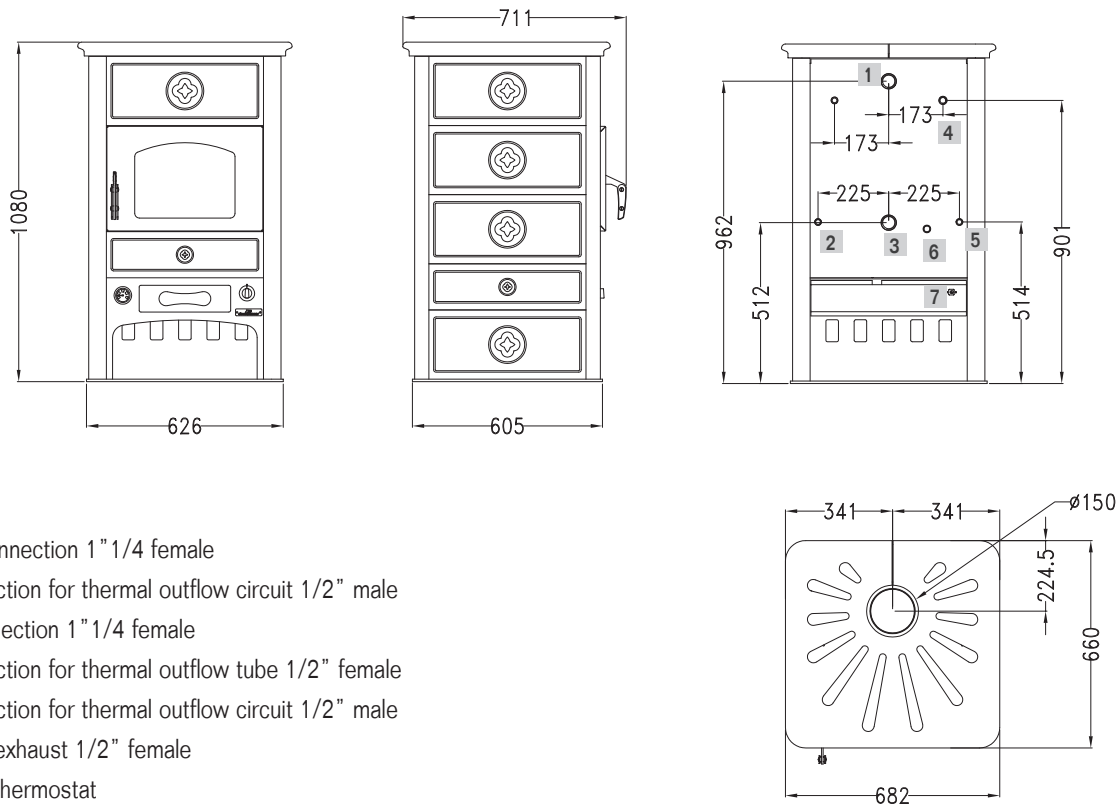**DATA SHEET I**

Nominal heat output: 18 kw	Nominal water heat output: 14.5 kw
Mean content of CO to 13% O <sub>2</sub> : 0.06 %	Efficiency: 78.5 %
Maximum operating pressure: 1.5 bar	Boiler capacity: 26.5 Lt
Firebox capacity: 83 Lt	Fill opening (LxH): 35x25 cm
Mean flue gas temperature: 257 °C	Flue gas mass flow: 15.8 g/s
Flue depression: mbar 0.15	Net weight/packaging included: kg 260/280